

Congratulations on your purchase of "Clear Bra" Paint Protection and Headlight Protection films.

What you need to know...

Your Paint Protection film has been sealed with XPEL Paint Protection Film Sealant.

DO NOT wash your vehicle with any type of car wash detergent for a period of seven (7) days to allow your film to fully cure on your vehicle.

There may be a small amount of setting solution residue remaining under your film following installation, THIS IS NORMAL and will dissipate within a short time. DO NOT press on the area or around the area. These visual annoyances will clear up, this may take up to 90 days dependent on temperature and humidity.

Minor variations observed in the material itself will clear up over time with exposure to the sun.

You may notice a light cloudiness under your headlight film, this is normal and should dissipate, this may take up to 45 days dependent on temperature and humidity.

Cosmetic imperfections, sometimes referred to as "disturbed adhesive", are unavoidable and may make themselves evident as a result of the installation technique necessary to apply the film.



VentureShield®

CLEARSHIELD®
PAINT PROTECTION FILM

...XPEL

Film Top Coat Protection

(non-residue, non-dyed)

- XPEL PPF Acrylic Sealant
- 3M® Performance Finish
- Klasse Sealant Glaze
- Meguiars Synthetic Sealant
- Wolfgang Sealant
- Zymol Estate Waxes



Deep Cleaning

- XPEL Protection Film Cleaner




In Between Waxing

- Zymol Field Glaze
- Zymol Detail Spray
- DP Gloss Booster
- Meguiars #135 Detailer Spray


AutoWash With Conditioners

- Meguiars #62 Car Wash Shampoo
- Meguiars #00 Hi-Tech Wash
- DP Auto Bath
- P21S Wash
- Zymol Autobath

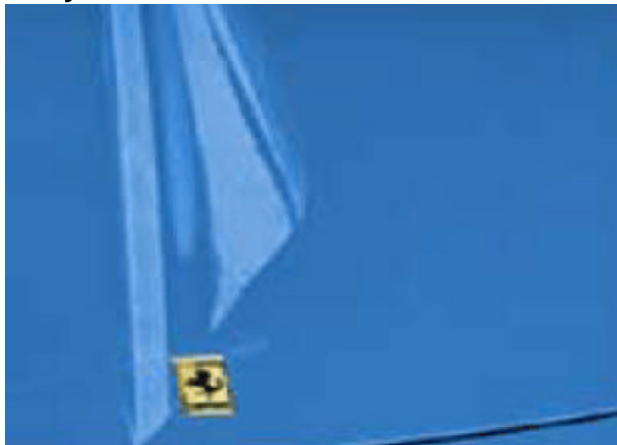

Clearshield Protection

Maintenance and Care
"Clear Bra" Paint Protection
and Headlight Protection

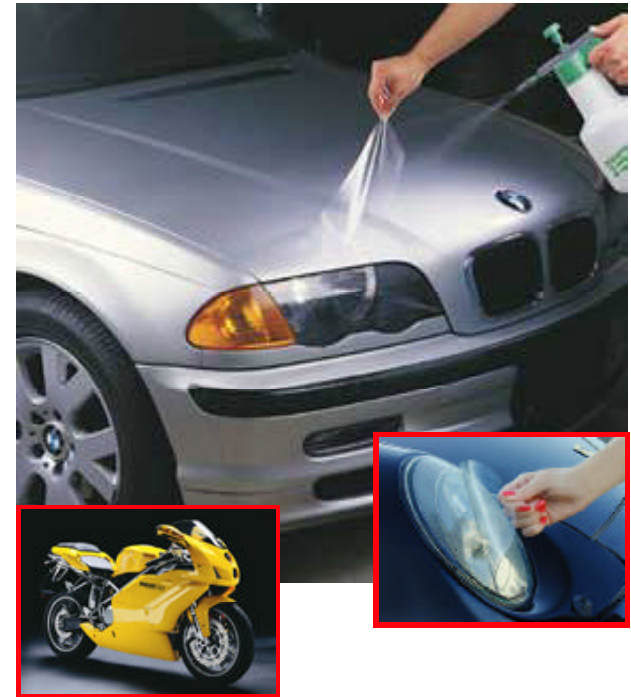

Automotive Candystore 

(772) 463-2345

4275 SE Federal Hwy Stuart, FL 34997

www.automotivecandystore.com

www.clearshieldprotection.com



Clearshield Protection

www.clearshieldprotection.com

Maintenance and Care



3M & Clearshield Paint Protection Film

Follow your vehicle manufacturer's requirements for care and maintenance of your paint finish. Wash regularly.

Remove any residue, bug acids, bird droppings immediately from your film, the acids may have a detrimental affect over time on your film. Maintain a good coat of wax/sealant on your film at all times.

Apply wax/sealants across your film rather than *in to* your film's edge. Should there be any buildup on your film's edge use a microfiber towel while applying soft strokes along your film's edge line.

Just in case...

Film scratches, two (2) options available:

1) Lightly pour 70% rubbing alcohol on the affected area of your film. Let dry.

2) Apply Meguiar's Scratch-X or Meguiars #6 Cleaner Wax with a microfiber applicator pad (do not use a foam pad). You may need to follow up with Option 1.

Staining, two (2) options available:

1) Apply Meguiars #9 Swirl Remover with a microfiber applicator pad (do not use a foam pad).

2) Try Wesleys Bleche on the affected area. Spray on film only, after allowing it to sit for 60 seconds, lightly rub in with a microfiber towel, rinse off with lots of water. Followup with top coat protection.



3M Headlight Protection Film

Refer to 3M Paint Protection Film "Maintenance and Care" above.

Do Not's

DO NOT use products with dyes, colored waxes, abrasive polishes or rubbing compounds.

DO NOT use products with petroleum distillates. This information is located on the back of the product container. These products may have a detrimental effect over time on your film.

DO NOT use any clay products on the surface of your paint protection or headlight protection film.

DO NOT pick at your film edges. Once your material is lifted it will not lie back down.

DO NOT use a buffer or polishing equipment on your film.

DO NOT use high pressure water to wash or rinse unless you are at least 48" away from your film's edge.

DO NOT use your fingernail to remove wax or dust buildup on your film's edge, the concentrated load will groove your paint.

DO NOT let wash water dry on your film's edge, especially your hood/fender section. (This is dependent on the type of water you wash with, some may leave water deposits which will build up.)

Please call us if you have any questions (772) 463-2345.

Deep Cleaning

XPEL Paint Protection Film Cleaner is designed to extract most environmental deposits such as tar, oil, hard water stains, bug acids and other contaminants from Polyurethane paint protection films. Its deep cleaning action restores the clear, glossy, freshly-installed appearance of the original film.



LAMIN-X Headlight Protection Film

Use 303 Protectant, Plexus or sealant/wax every two months. Wipe dry with a microfiber towel.

Maintenance and Care



XPEL & Ventureshield Ultra Paint Protection Film

Follow your vehicle manufacturer's requirements for care and maintenance of your paint finish. Wash regularly.

Remove any residue, bug acids, bird droppings immediately from your film, the acids may have a detrimental affect over time on your film. Maintain a good coat of wax/sealant on your film at all times.

We recommend the use of *XPEL Paint Protection Sealant* to protect your film and eliminate staining.

Apply wax/sealants across your film rather than *in to* your film's edge. Should there be any buildup on your film's edge use a microfiber towel while applying soft strokes along your film's edge line.

Just in case...

Film scratches:

1) Apply Meguiars #9 Swirl Remover with a microfiber applicator pad (do not use a foam pad). Followup with *XPEL Paint Protection Sealant*.

2) Ventureshield Ultra only: You may use light heat to reflow the film. Do not use concentrated heat in any one section. Or, you can leave the vehicle in the hot sun to assist in scratch removal.

Staining:

1) Try Wesleys Bleche on the affected area. Spray on film only, after allowing it to sit for 60 seconds, lightly rub in with a microfiber towel, rinse off with lots of water. Followup with top coat protection.



XPEL Headlight Protection Film

Apply 303 Protectant, Plexus or sealant/wax every two months. Wipe dry with a microfiber towel.